



# PRIMER GT

## GENERAL INFORMATION


### Description

Mat undercoat

### Intended use

Interior

- For the pre-spray application of droplets (BAGAR GT®)

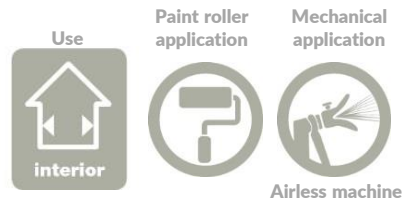

## PRODUCT ADVANTAGES

- + Smooth application
- + Colour is identical to that of BAGAR GT®
- + Masks missed areas when spraying droplets

## USE

### DILUTION

Ready mixed  
(up to 5% if necessary)

### PREPARATION

Mix before use

### APPLICATION

#### - Conditions

Do not apply at temperatures of below +8°C or above +35°C, or at a relative humidity of above 70% H.R.

#### - Equipment

Brush, paint roller

#### - Machine

Airless machine (nozzle up to 5.17)

#### - Equipment cleaning

With water immediately after use.  
Do not throw away into drains, dispose of this material and its container to an approved disposal contractor or taken to municipal collection point. Do not dispose into the environment.

### AVERAGE CONSUMPTION

Roll : 10 to 13 m<sup>2</sup>/l  
Airless : 6 to 8 m<sup>2</sup>/l

### SUBSTRATES

Concrete, cement, concrete block, brick, plasterboard, glass cloth.  
*Substrates must be hard, cohesive, clean, sound and dry according to the local standards.*


### OVERCOAT

Plaster, interior conventional paint, light-weight wall coverings.



# PRIMER GT

## TECHNICAL DATA

<b>COMPONANTS</b>	Acrylic copolymers dispersion, titanium dioxide and fillers selected.
<b>DENSITY</b>	1.6 ± 0.1
<b>pH</b>	8.5 ± 1
<b>COLOUR</b>	White
<b>ASPECT</b>	Matt
<b>DRYING TIME</b>	Approximately 1 hour
<b>WAITING TIME BEFORE OVERCOATING</b>	Approximately 12 hours
<b>CLASSIFICATION</b>	NF T 36- 005- Famille I, class 7b2
<b>NORM</b>	NF EN 13 300
<b>V.O.C</b>	< 1 g/l (Ready mixed)
<b>HEALTH AND SAFETY</b>	 Use in a well-ventilated place. Avoid direct contact with skin and eyes. In case of prolonged contact, it is recommended to wear suitable gloves. Application by projection, wearing glasses and a mask is recommended. Safety data sheet available on <a href="http://www.beissier.eu">www.beissier.eu</a> or <a href="http://www.quickfds.com">www.quickfds.com</a>
<b>PACKAGING</b>	15 L bucket
<b>STORAGE</b>	12 months from date of manufacture, in unopened original packaging, protected from frost, heat (max. +30°C), sun and moisture. Close well after use. Store in original packaging.

This data sheet supersedes and replaces any prior sheet relating to the same product.

Date of issue : April 2017

The purpose of this data sheet is to inform our customers about our product's properties. The information presented in the sheet is based on the current state of our knowledge. However, this information is no substitute for a description pertaining specifically to the type and condition of the substrate concerned. Since technical progress is continuously being made, it is our customer's responsibility, prior to use, to check with us that updated edition of this sheet has not been issued.