

## INT/EXT WATERPROOF MASONRY FILLER



### GENERAL INFORMATION


#### Description

Powder waterproof masonry filler

#### Intended use

Interior/exterior

- Waterproofing, filling & finishing masonry substrate
- Repairing and shaping windows sills & mouldings

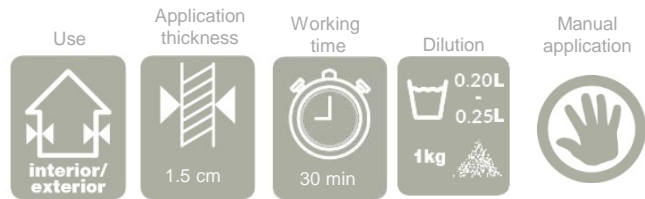

### PRODUCT ADVANTAGES

- + Fills up to 1.5 cm in 1 application
- + Can be applied on damp substrates
- + Waterproof after 3 mm thickness
- + Repairs reinforced concrete, providing protection against carbonation process
- + Resistant to saltpeter and seawater
- + Flexible
- + Easy to mix
- + Easy to apply
- + Water vapour permeable

### USE

<b>DILUTION</b>	20% - 25% - i.e. 0.20 – 0.25 litre of water per 1 kg of powder
<b>PREPARATION</b>	Gradually pour the powder into water, stirring until a homogeneous paste is obtained. Can be applied immediately.
<b>APPLICATION</b>	
<i>Conditions</i>	Do not apply at temperatures of below +5°C or above +35°C, or at a relative humidity of above 80% H.R.
<i>Equipment</i>	Filling knife, blade, smoothing trowel.
<i>Equipment cleaning</i>	With water before completely dry. Do not throw away into drains, dispose of this material and its container to an approved disposal contractor or taken to municipal collection point. Do not dispose into the environment.
<b>APPLICATION THICKNESS</b>	1.5 cm
<b>AVERAGE CONSUMPTION</b>	1.2 kg of powder fills a volume of litre
<b>SUBSTRATES</b>	Concrete, cellular concrete, cement, concrete block, brick, mortars, stone. <i>Substrates must be hard, cohesive, clean, sound and dry according to the local standards.</i>
<b>OVERCOAT</b>	Primer, interior conventional paint, light-weight wall coverings, facade paint.

## INT/EXT WATERPROOF MASONRY FILLER



### TECHNICAL DATA

<b>COMPONANTS</b>	Cement base coat mix, organic binder, fibres, mineral fillers, additives.
<b>pH</b>	12.5 ± 1
<b>COLOUR</b>	Light grey
<b>WORKING TIME AT 20°C</b>	Approximately 30 minutes
<b>WAITING TIME BEFORE OVERCOATING</b>	48 hours
<b>CLASSIFICATION</b>	NF T 36-005 - Family IV, class 4c
<b>V.O.C</b>	< 0.5 g/l (Ready mixed)

### HEALTH AND SAFETY



Danger - Contains cement  
Use in a well-ventilated place. Avoid direct contact with skin and eyes. Do not breathe dust.

In case of prolonged contact, it is recommended to wear suitable gloves. Safety data sheet available on [www.beissier.eu](http://www.beissier.eu) or [www.quickfds.com](http://www.quickfds.com)

### PACKAGING

6 kg bag, 2 kg and 1 kg box

### STORAGE

12 months from date of manufacture, in unopened original packaging, protected from frost, heat (max. +30°C), sun and moisture. Close well after use. Store in original packaging.

This data sheet supersedes and replaces any prior sheet relating to the same product.

Date of issue : may 2020

The purpose of this data sheet is to inform our customers about our product's properties. The information presented in the sheet is based on the current state of our knowledge. However, this information is no substitute for a description pertaining specifically to the type and condition of the substrate concerned. Since technical progress is continuously being made, it is our customer's responsibility, prior to use, to check with us that updated edition of this sheet has not been issued.