



G

GENERAL INFORMATION


Description

Ready mixed spray-applied plaster

Intended use

Interior

- Levelling irregular substrates

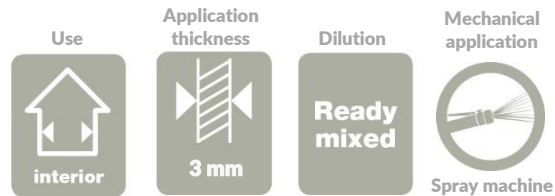

PRODUCT ADVANTAGES

- + Good levelling qualities
- + Smooth application
- + Long working time
- + Can be skimmed, floated or left in the as-sprayed state for a relief effect

USE

DILUTION

Ready mixed
(up to 3% if necessary)

PREPARATION

Mix before use

APPLICATION

- Conditions

Do not apply at temperatures of below +8°C or above +35°C, or at a relative humidity of above 70% H.R.

- Equipment

Smoothing trowel, blade.

- Machine

Spray machine (nozzle up to 6 mm)

- Equipment cleaning

With water before completely dry.

Do not throw away into drains, dispose of this material and its container to an approved disposal contractor or taken to municipal collection point. Do not dispose into the environment.

APPLICATION THICKNESS 3 mm

AVERAGE CONSUMPTION 1.5 kg/m²

SUBSTRATES

Concrete, cellular concrete, cement, concrete block, brick, plaster, plasterboard, old painted substrates, old sprinkle effect, glass cloth.
Substrates must be hard, cohesive, clean, sound and dry according to the local standards.


OVERCOAT

Primer, interior conventional paint, light-weight wall coverings.



G

TECHNICAL DATA

COMPONANTS	Polymer base aqueous phase coat mix, mineral fillers, additives.
DENSITY	1.6 ± 0.1
pH	8 ± 1
COLOUR	White
WAITING TIME BEFORE OVERCOATING	Once completely dry
CLASSIFICATION	NF T 36-005 - Family III, class 2
NORM	NF EN 16566
V.O.C	< 1 g/l (Ready mixed)
HEALTH AND SAFETY	 Use in a well-ventilated place. Avoid direct contact with skin and eyes. In case of prolonged contact, it is recommended to wear suitable gloves. Application by projection, wearing glasses and a mask is recommended. Safety data sheet available on www.beissier.eu or www.quickfds.com
PACKAGING	25 kg bag
STORAGE	12 months from date of manufacture, in unopened original packaging, protected from frost, heat (max. +30°C), sun and moisture. Close well after use. Store in original packaging.

This data sheet supersedes and replaces any prior sheet relating to the same product.

Date of issue : April 2017

The purpose of this data sheet is to inform our customers about our product's properties. The information presented in the sheet is based on the current state of our knowledge. However, this information is no substitute for a description pertaining specifically to the type and condition of the substrate concerned. Since technical progress is continuously being made, it is our customer's responsibility, prior to use, to check with us that updated edition of this sheet has not been issued.

Beissier

Beissier - UK · 4th Floor · 300 High Holborn · London WC1 7JH · Fax : 020 7092 669

Customer Service : 020 7092 6696 · contact@beissier.eu