



## WR


### GENERAL INFORMATION

#### Description

Ready mixed spray-applied decorative coating with sprinkle effect

#### Intended use

- Interior
- Relief decoration with textured appearance
  - Ideally suited to heavy traffic areas (corridors, stairwells etc.)

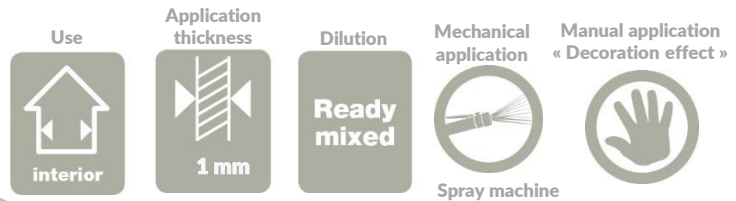

## PRODUCT ADVANTAGES

- + Resin-rich
- + White
- + Very hard
- + Can be hand-floated to create decorative effects
- + Can be tinted upon request with water base colourants during the production process

## USE

#### DILUTION

Ready mixed  
(up to 3% if necessary)

#### PREPARATION

Mix before use

#### APPLICATION

##### - Conditions

Do not apply at temperatures of below +8°C or above +35°C, or at a relative humidity of above 70% H.R.

##### - Equipment

Smoothing trowel, trowel.

##### - Machine

Spray machine (nozzle up to 6 mm)

##### - Equipment cleaning

With water before completely dry.  
Do not throw away into drains, dispose of this material and its container to an approved disposal contractor or taken to municipal collection point. Do not dispose into the environment.

#### RECOMMENDATIONS

For damp rooms and premises, must be covered with a suitable paint.

#### APPLICATION THICKNESS

1 mm

#### AVERAGE CONSUMPTION

1 to 2 kg/m<sup>2</sup>

#### SUBSTRATES

Concrete, cellular concrete, cement, concrete block, brick, plaster, plasterboard.  
*Substrates must be hard, cohesive, clean, sound and dry according to the local standards.*


#### OVERCOAT

Primer, interior conventional paint, varnish, wax.



# WR

## TECHNICAL DATA

<b>COMPONANTS</b>	Polymer base aqueous phase coat mix, mineral fillers, additives.
<b>DENSITY</b>	1.7 ± 0.1
<b>pH</b>	8 ± 1
<b>COLOUR</b>	White
<b>CLASSIFICATION</b>	NF T 36-005 - Family III, class 2
<b>NORM</b>	NF EN 16566
<b>V.O.C</b>	< 25 g/l (Ready mixed)
<b>HEALTH AND SAFETY</b>	 Use in a well-ventilated place. Avoid direct contact with skin and eyes. In case of prolonged contact, it is recommended to wear suitable gloves. Application by projection, wearing glasses and a mask is recommended. Safety data sheet available on <a href="http://www.beissier.eu">www.beissier.eu</a> or <a href="http://www.quickfds.com">www.quickfds.com</a>
<b>PACKAGING</b>	25 kg bag
<b>STORAGE</b>	12 months from date of manufacture, in unopened original packaging, protected from frost, heat (max. +30°C), sun and moisture. Close well after use. Store in original packaging.

This data sheet supersedes and replaces any prior sheet relating to the same product.

Date of issue : April 2017

The purpose of this data sheet is to inform our customers about our product's properties. The information presented in the sheet is based on the current state of our knowledge. However, this information is no substitute for a description pertaining specifically to the type and condition of the substrate concerned. Since technical progress is continuously being made, it is our customer's responsibility, prior to use, to check with us that updated edition of this sheet has not been issued.